

MS102061165.pdf

by

Submission date: 02-Nov-2021 05:32AM (UTC-0400)

Submission ID: 1690893712

File name: MS102061165.pdf (1.08M)

Word count: 2787

Character count: 14840

See discussions, stats, and author profiles for this publication at: <https://www.researchgate.net/publication/319913205>

Numerical simulation and circuit implementation for a sprott chaotic system with one hyperbolic sinusoidal nonlinearity

Article in Far East Journal of Mathematical Sciences · September 2017

DOI: 10.17654/MS102061165

CITATIONS

12

READS

407

4 authors:



Aceng Sambas

Universitas Muhammadiyah Tasikmalaya

127 PUBLICATIONS 1,016 CITATIONS

SEE PROFILE



Mujiarto Bin Parsusah

Universitas Muhammadiyah Tasikmalaya

44 PUBLICATIONS 79 CITATIONS

SEE PROFILE



Mustafa Mamat

Universiti Sultan Zainal Abidin

397 PUBLICATIONS 2,611 CITATIONS

SEE PROFILE



W. S. Mada Sanjaya

UIN Sunan Gunung Djati Bandung

73 PUBLICATIONS 751 CITATIONS

SEE PROFILE

Some of the authors of this publication are also working on these related projects:



Modelling using artificial intelligence, [View project](#)



NUMERICAL METHODS FOR THE SOLUTION OF FUZZY NONLINEAR EQUATIONS HAVING SINGULAR JACOBIAN [View project](#)



**NUMERICAL SIMULATION AND CIRCUIT
IMPLEMENTATION FOR A SPROTT CHAOTIC
SYSTEM WITH ONE HYPERBOLIC
SINUSOIDAL NONLINEARITY**

**Aceng Sambas^{a,b}, Mujiarto^a, Mustafa Mamat^{b,*} and
W. S. Mada Sanjaya^c**

^aDepartment of Mechanical Engineering
Universitas Muhammadiyah Tasikmalaya
Indonesia
e-mail: acenx.bts@gmail.com

^bFaculty of Informatics and Computing
Universiti Sultan Zainal Abidin
Kuala Terengganu, Malaysia
e-mail: must@unisza.edu.my

^cDepartment of Physics
Universitas Islam Negeri Sunan Gunung Djati
Bandung, Indonesia

Abstract

In this paper, the phenomenon of chaos that produced in the case of Sprott chaotic system with one hyperbolic sinusoidal nonlinearity has been studied extensively. The basic dynamical properties of such system are discovered through equilibrium points, phase portrait,

Received: February 19, 2017; Revised: April 9, 2017; Accepted: May 4, 2017

2010 Mathematics Subject Classification: 37D45.

Keywords and phrases: Sprott chaotic system, Lyapunov exponents and Poincaré.

*Corresponding author

Lyapunov exponents and Poincaré map. Furthermore, an electronic circuit realization of the proposed system is presented in details. Finally, the circuit experimental results of the chaotic attractors show agreement with numerical simulations.

1. Introduction

Chaos is used to explain the behavior of certain dynamical complex, i.e., systems whose state variables evolve with time, which may exhibit dynamics that are highly sensitive to initial conditions. Henri Poincaré was the first discoverer of chaos. In 1890, while studying the three-body problem, he found that there existed some orbits which are non-periodic [1-2]. Interest in nonlinear dynamics and in particular chaotic dynamics has grown rapidly since 1963, Edward Lorenz, the MIT meteorologist, he was designing a 3-D model for weather prediction [3].

In the literature, Sprott [4] was the first to introduce a simple flow with no equilibrium points. In [5], Malasoma proposed the simplest dissipative jerk equation that is parity invariant, Sun and Sprott [6] constructed a piecewise exponential jerk system. In [7], Sprott gave a 3-D jerk chaotic system having six terms on the R.H.S. with one hyperbolic tangential nonlinearity. In [8], Li and Sprott constructed the chaotic flows with a single nonquadratic term and in [9], Vaidyanathan et al. created a six-term novel jerk chaotic system with two exponential nonlinearities.

Chaos has been widely applied to many scientific disciplines, such as ecology [10], biology [11], economy [12], random bit generators [13], psychology [14], laser [15], astronomy [16], chemical reaction [17], robotics [18], text encryption [19], image encryption [20], voice encryption [21], secure communication systems [22-27] etc.

Motivated by the above researches, a Sprott chaotic system with one hyperbolic sinusoidal nonlinearity is proposed in this work. In Section 2, we present Sprott system from three first-order autonomous ODEs, numerical results in evolving phase portraits, Lyapunov exponent's analysis and Poincaré map analysis. In Section 3, basic dynamical properties of the Sprott

chaotic system are discussed including equilibria and Jacobian matrices. In Section 4 we present an electronic circuit that implements the nonlinear system and Finally, Section 5 contains the conclusion remarks.

2. The Sprott Chaotic System with One Hyperbolic Sinusoidal Nonlinearity

The dynamics of the Sprott chaotic system with one hyperbolic sinusoidal nonlinearity [28] is described by:

$$\ddot{x} + 0.6\dot{x} + x = x - 0.5 \sinh x. \tag{1}$$

In system form, the differential equation (1) can be expressed as:

$$\left. \begin{aligned} \dot{x} &= y \\ \dot{y} &= z \\ \dot{z} &= x - a \sinh(x) - y - bz \end{aligned} \right\}, \tag{2}$$


where x, y, z are state variables and when $a = 0.5$ and $b = 0.51$, the Sprott chaotic system with one hyperbolic sinusoidal nonlinearity (2) exhibits strange attractor, we have chosen the initial conditions for the Sprott system (2) as

$$x_0 = 0, y_0 = 0, z_0 = 1. \tag{3}$$


For numerical simulation of chaotic system defined by a set of differential equation such as the Sprott chaotic system with one hyperbolic sinusoidal nonlinearity (2), different integration techniques can be used. In the MATLAB 2010, ODE45 solver yielding a fourth-order Runge-Kutta integration solution has been used. Figures 1(a)-(c) show the projections of the phase space orbit on to the $x - y$ plane, the $x - z$ plane and the $y - z$ plane, respectively. As it is shown, for the chosen set of parameters and initial conditions, the Sprott chaotic system with one hyperbolic sinusoidal nonlinearity (2) presents chaotic attractors of jerk attractor type.

The dynamics of the Sprott chaotic system with one hyperbolic sinusoidal nonlinearity can be characterized with its Lyapunov exponents which are computed numerically by Wolf algorithm proposed in [29]. Figure


2 shows the Lyapunov exponents of the Sprott system for constant parameter $a = 0.5$ and $b = 0.51$. The Sprott chaotic system is chaotic with positive Lyapunov exponents. In addition, the Poincaré map of the system in Figure 3 also reflects properties of chaos.

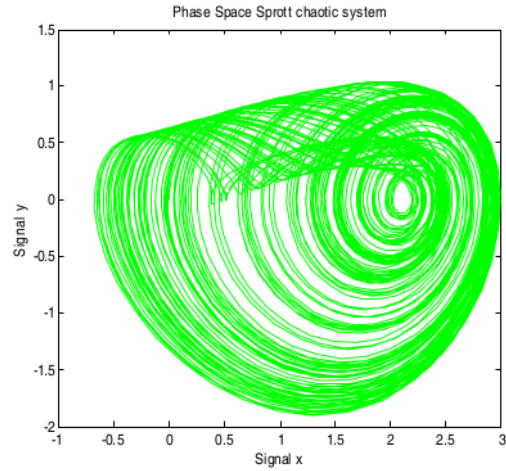

(a)

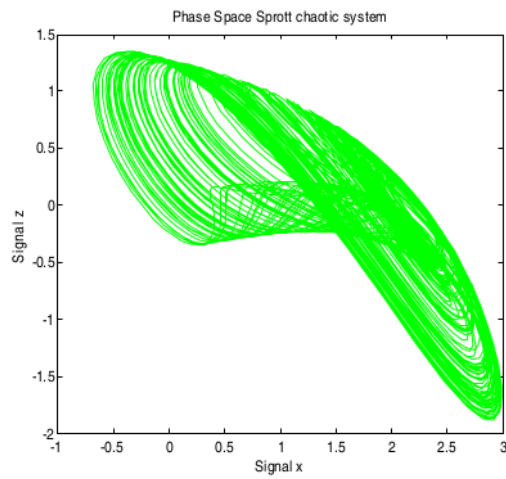

(b)

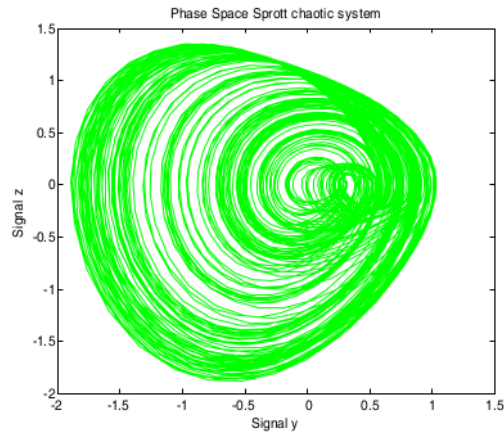

(c)

Figure 1. Numerical simulation results using MATLAB 2010, for $a = 0.5$ and $b = 0.51$, in (a) $x - y$ plane, (b) $x - z$ plane, (c) $y - z$ plane.

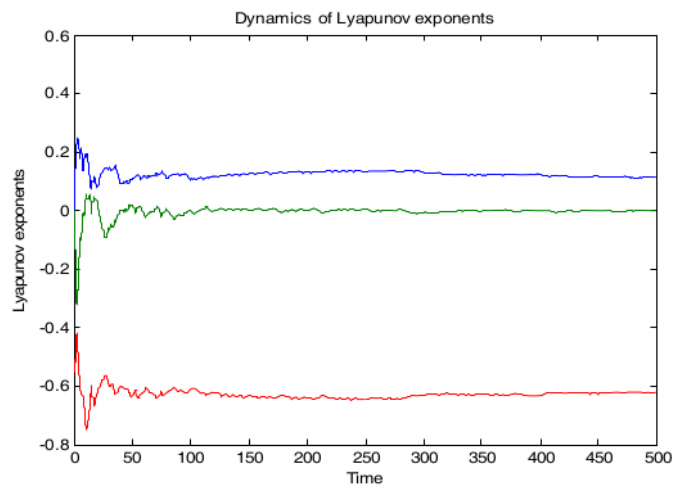


Figure 2. The dynamics of Lyapunov exponents of Sprott chaotic system for $a = 0.5$ and $b = 0.51$, using MATLAB 2010.

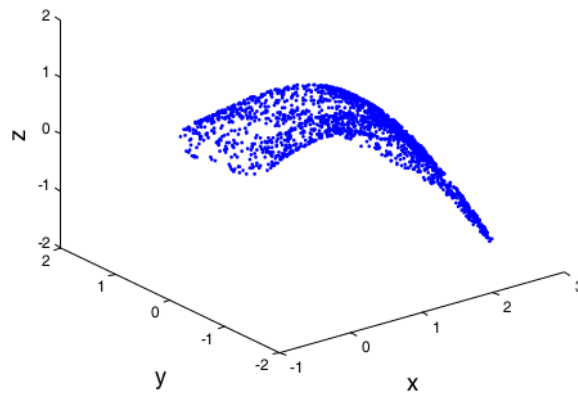


Figure 3. Poincaré map in the $x - y - z$ space plane when $a = 0.5$ and $b = 0.51$, using MATLAB 2010.

3. Basic Properties of the Sprott Chaotic System with One Hyperbolic Sinusoidal Nonlinearity

The equilibrium points of (2) denote by $E(\bar{x}, \bar{y}, \bar{z})$, are the zeros of its nonlinear algebraic system which can be written as:

$$\left. \begin{aligned} 0 &= y \\ 0 &= z \\ 0 &= x - a \sinh(x) - y - bz \end{aligned} \right\}. \quad (4)$$

The Sprott chaotic system with one hyperbolic sinusoidal nonlinearity has one equilibrium point $E_0(0, 0, 0)$. The dynamical behavior of equilibrium point can be studied by computing the eigenvalue of the Jacobian matrix J of system (2), where:

$$J(\bar{x}, \bar{y}, \bar{z}) = \begin{bmatrix} 0 & 1 & 0 \\ 0 & 0 & 1 \\ 1 - 0.5 \cosh(x) & -1 & -0.51 \end{bmatrix}. \quad (5)$$

For equilibrium points $E_0(0, 0, 0)$, the Jacobian becomes:

$$J(0, 0, 0) = \begin{bmatrix} 0 & 1 & 0 \\ 0 & 0 & 1 \\ 0.5 & -1 & -0.51 \end{bmatrix}. \tag{6}$$

The eigenvalues are obtained by solving the characteristic equation, $\det[\lambda I - J_1] = 0$ which is:

$$\lambda^3 + 0.51\lambda^2 + \lambda - 0.5. \tag{7}$$

Yielding eigenvalues of $\lambda_1 = 0.3753$, $\lambda_2, \lambda_3 = -0.4426 \pm 1.0659i$, where λ_1 is a positive real number and λ_2, λ_3 are a pair of complex conjugate eigenvalues with negative real parts, which indicates that these two imaginary equilibrium points are saddle points. This equilibrium point is unstable.

4. Circuit Realization of the Sprott Chaotic System with One Hyperbolic Sinusoidal Nonlinearity

In this section, we design an electronic circuit modeling of the Sprott chaotic system with one hyperbolic sinusoidal nonlinearity. The circuit in Figure 4 has been designed following an approach based on operational amplifiers [30-34], where the state variables x, y, z of the system (2) are associated with the voltages across the capacitors C_1, C_2 and C_3 , respectively. The nonlinear term of system (2) are implemented with the analog multiplier. By applying Kirchhoff's laws to the designed electronic circuit, its nonlinear equations are derived in the following form:

$$\left. \begin{aligned} \dot{x} &= \frac{1}{C_1 R_1} y \\ \dot{y} &= \frac{1}{C_2 R_2} z \\ \dot{z} &= \frac{1}{C_3 R_3} x - \frac{1}{C_3 R_4} \sinh(x) - \frac{1}{C_3 R_5} y - \frac{1}{C_3 R_6} z \end{aligned} \right\}. \tag{8}$$

We choose $R_1 = R_2 = R_3 = R_5 = R_7 = R_8 = R_9 = R_{10} = R_{11} = R_{12} = R_{13} = 10k\Omega$, $R_4 = 200\Omega$, $R_6 = 19.61k\Omega$, $R_{14} = 120k\Omega$, $R_{15} = 60k\Omega$, $R_{16} = 1M\Omega$, $C_1 = C_2 = C_3 = 10nF$. The circuit has three integrators by using Op-amp TL082CD in a feedback loop and two multipliers IC AD633. The supplies of all active devices are ± 15 Volt. With MultiSIM 10.0, we obtain the experimental observations of system (2) as shown in Figure 5. As compared with Figure 1 a good qualitative agreement between the numerical simulation and the MultiSIM 10.0 results of the Sprott chaotic system is confirmed.

The hyperbolic sinusoidal function as Taylor series [35, 36]:

$$\sinh(x) = x + \frac{x^3}{3!} + \frac{x^5}{5!} + \dots = \sum_{n=0}^{\infty} \frac{x^{2n+1}}{(2n+1)!}. \tag{9}$$

The corresponding circuital equation of each block is given as [35]:

$$\sinh(x) = -\frac{R_{13}}{R_{16}}x - \frac{R_{13}}{R_{15}}x^3 - \frac{R_{13}}{R_{14}}x^5 \approx \delta \sinh(x), \tag{10}$$

where $\delta = -\frac{1}{100}$ is the scaling factor.



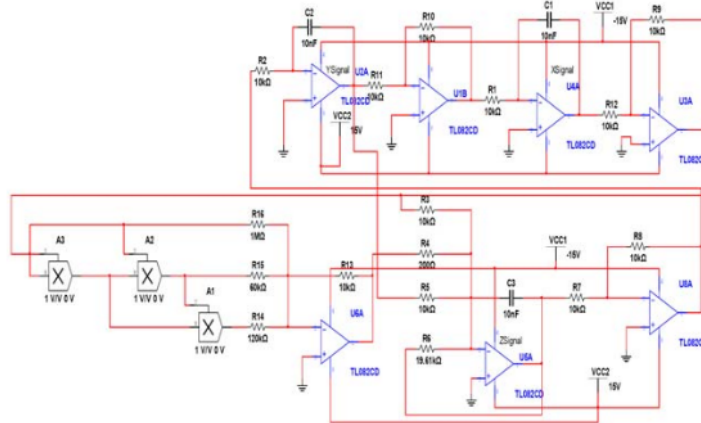



Figure 4. Schematic of the proposed Sprott chaotic system with one hyperbolic sinusoidal nonlinearity by using MultiSIM 10.0.

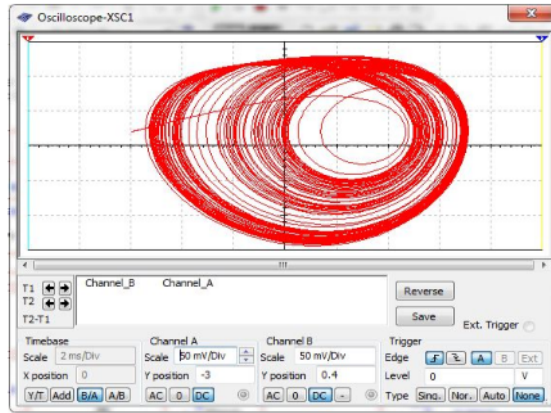

(a)

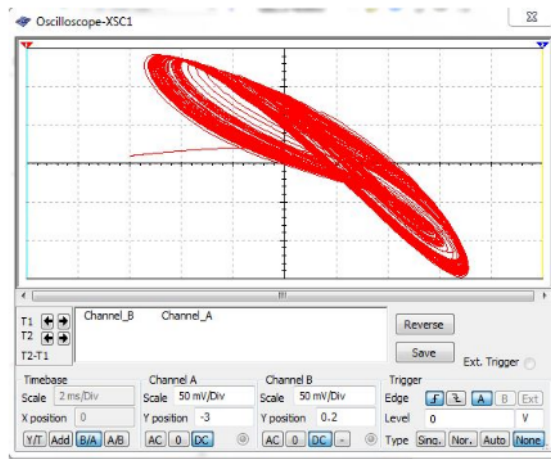

(b)

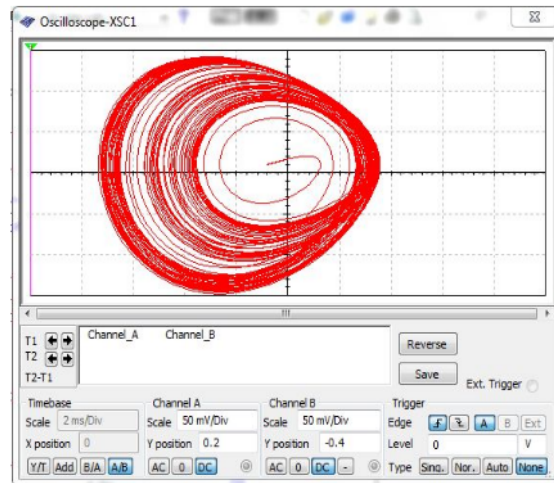

(c)

Figure 5. Various projections of the chaotic attractor using MultiSIM in $x - y$ plane, (b) $x - z$ plane and (c) $y - z$ plane.

5. Conclusion

A Sprott chaotic system with one hyperbolic sinusoidal nonlinearity is constructed and analyzed. The fundamental properties of the system such as equilibrium points, Lyapunov exponents and Poincaré map as well as its phase portraits were described in detail. Moreover, it is implemented via a designed circuit with MultiSIM and numerical simulation using MATLAB, showing very good agreement with the simulation result. Hence, we can apply this Sprott chaotic system with one hyperbolic sinusoidal nonlinearity in practical applications like robotic, random bits generator and secure communications.

Acknowledgement

The authors thank the anonymous referees for their valuable suggestions for the improvement of the manuscript.

References

- [1] H. Zhang, Chaos synchronization and its application to secure communication, Ph. D. Thesis, University of Waterloo, Canada, 2010.
- [2] J. H. Poincaré, Sur le problème des trois corps et les équations de la dynamique, divergence des séries de M. Lindstedt, *Acta Mathematica* 13(3) (1890), 1-270.
- [3] E. N. Lorenz, Deterministic nonperiodic flow, *J. Atmospheric Sci.* 20 (1963), 130-141.
- [4] J. C. Sprott, Some simple chaotic flows, *Phys. Lett. E* 50 (1994), 647-650.
- [5] J. M. Malasoma, A new class of minimal chaotic flows, *Phys. Lett. A* 264 (2000), 383-389.
- [6] K. H. Sun and J. H. Sprott, A simple jerk system with piecewise exponential nonlinearity, *Int. J. Nonlinear Sci. Numer. Simul.* 10 (2009), 1443-1450.
- [7] J. C. Sprott, *Elegant Chaos Algebraically Simple Chaotic Flows*, World Scientific, Singapore, 2010.
- [8] C. Li and J. C. Sprott, Chaotic flows with a single nonquadratic term, *Phys. Lett. A* 378 (2014), 178-183.
- [9] S. Vaidyanathan, K. Volos Ch., I. M. Kyprianidis, I. N. Stouboulos and V. T. Pham, Analysis, adaptive control and anti-synchronization of a six-term novel jerk chaotic system with two exponential nonlinearities and its circuit simulation, *Journal of Engineering Science and Technology Review* 8(2) (2015), 24-36.
- [10] W. S. M. Sanjaya, I. Mohd, M. Mamat and Z. Salleh, mathematical model of three species food chain interaction with mixed functional response, *International Journal of Modern Physics: Conference Series* 9 (2012), 334-340.
- [11] W. S. M. Sanjaya, M. Mamat, Z. Salleh and I. Mohd, Bidirectional chaotic synchronization of Hindmarsh-Rose neuron model, *Appl. Math. Sci.* 5(54) (2011), 2685-2695.
- [12] S. Bouali, A. Buscarino, L. Fortuna, M. Frasca and L. V. Gambuzza, Emulating complex business cycles by using an electronic analogue, *Nonlinear Analysis: Real World Applications* 13 (2012), 2459-2465.
- [13] K. Volos Ch., I. M. Kyprianidis and I. N. Stouboulos, Text encryption scheme realized with a chaotic pseudo-random bit generator, *Journal of Engineering Science and Technology Review* 6 (2013), 9-14.

- [14] J. C. Sprott, Dynamical models of love, *Nonlinear Dyn. Psych. Life Sci.* 8 (2004), 303-314.
- [15] N. Li, W. Pan, L. Yan, B. Luo and X. Zou, Enhanced chaos synchronization and communication in cascade-coupled semiconductor ring lasers, *Commun. Nonlinear Sci. Numer. Simul.* 19 (2014), 1874-1883.
- [16] D. W. Moore and E. A. Spiegel, A thermally excited non-linear oscillator, *Astrophys. J.* 143 (1986), 871-887.
- [17] M. Kyriazis, Applications of chaos theory to the molecular biology of aging, *Experimental Gerontology* 26 (1991), 569-572.
- [18] A. Sambas, S. Vaidyanathan, M. Mamat, W. S. M. Sanjaya and D. S. Rahayu, A 3-D novel jerk chaotic system and its application in secure communication system and mobile robot navigation, *Advances and Applications in Chaotic Systems*, Springer International Publishing, 2016, pp. 283-310.
- [19] Ch. K. Volos, I. M. Kyprianidis and I. N. Stouboulos, Text encryption scheme realized with a chaotic pseudo-random bit generator, *Journal of Engineering Science and Technology Review* 6 (2013), 9-14.
- [20] A. S. Andreatos and A. P. Leros, Secure image encryption based on a Chua chaotic noise generator, *Journal of Engineering Science and Technology Review* 6 (2013), 90-103.
- [21] M. Abdulkareem and I. Q. Abduljaleel, Speech encryption using chaotic map and Blowsh algorithms, *Journal of Basrah Researches* 39 (2013), 68-76.
- [22] A. Sambas, W. S. M. Sanjaya and Halimatussadiyah, Unidirectional chaotic synchronization of Rossler circuit and its application for secure communication, *WSEAS Transactions on Systems* 9(11) (2012), 506-515.
- [23] A. Sambas, W. S. M. Sanjaya, M. Mamat and Halimatussadiyah, Design and analysis bidirectional chaotic synchronization of Rossler circuit and its application for secure communication, *Appl. Math. Sci.* 7(1) (2013), 11-21.
- [24] A. Sambas, W. S. M. Sanjaya, M. Mamat and R. P. Prastio, Mathematical Modelling of Chaotic Jerk Circuit and its Application in Secure Communication System, *Advances in Chaos Theory and Intelligent Control*, Springer International Publishing, 2016, pp. 133-153.
- [25] A. Sambas, M. Mamat and O. Tacha, Design and numerical simulation of unidirectional chaotic synchronization and its application in secure communication system, *Journal of Engineering Science and Technology Review* 6(4) (2013), 66-73.

- [26] A. Sambas, W. S. M. Sanjaya and M. Mamat, Bidirectional coupling scheme of chaotic systems and its application in secure communication system, *Journal of Engineering Science and Technology Review* 8(2) (2015), 89-95.
- [27] A. Sambas, W. S. M. Sanjaya, M. Mamat, Z. Salleh and F. S. Mohamad, Secure communications based on the synchronization of the new Lorenz-like attractor circuit, *Advanced Studies in Theoretical Physics* 9(8) (2015), 379-394.
- [28] J. C. Sprott, Simple chaotic systems and circuits, *Amer. J. Phys.* 68 (2000), 758-763.
- [29] A. Wolf, J. B. Swift, H. L. Swinney and J. A. Vastano, Determining Lyapunov exponents from a time series, *Physica D* 16 (1985), 285-317.
- [30] X. F. Li, Y. D. Chu, J. G. Zhang and Y. X. Chang, Nonlinear dynamics and circuit implementation for a new Lorenz-like attractor, *Chaos, Solitons and Fractals* 41 (2009), 2360-2370.
- [31] C. Li, I. Pehlivan, J. C. Sprott and A. Akgul, A novel four-wing strange attractor born in bistability, *IEICE Electronics Express* 12(4) (2015), 1-12.
- [32] C. Li, J. C. Sprott, Z. Yuan and H. Li, Constructing chaotic systems with total amplitude control, *International Journal of Bifurcation and Chaos* 25(10) (2015), 1-14.
- [33] C. Li, J. C. Sprott and W. Thio, Linearization of the Lorenz system, *Phys. Lett. A* 379 (2015), 888-893.
- [34] C. Li, J. C. Sprott and W. Thio, A new piecewise-linear hyperchaotic circuit, *IEEE Trans. Circuits Syst.-II: Exp. Briefs* 61 (2014), 977-981.
- [35] S. Vaidyanathan, C. Volos, V. T. Pham, K. Madhavan and B. A. Idowu, Adaptive backstepping control, synchronization and circuit simulation of a 3-D novel jerk chaotic system with two hyperbolic sinusoidal nonlinearities, *Arch. Control Sci.* 24(3) (2014), 375-403.
- [36] E. Kreyszig, *Advanced Engineering Mathematics*, John Wiley and Sons, 2010.

ORIGINALITY REPORT

19%

SIMILARITY INDEX

10%

INTERNET SOURCES

13%

PUBLICATIONS

3%

STUDENT PAPERS

MATCH ALL SOURCES (ONLY SELECTED SOURCE PRINTED)

1%

★ jims-a.org

Internet Source

Exclude quotes Off

Exclude matches Off

Exclude bibliography On

FINAL GRADE

/0

GENERAL COMMENTS

Instructor

PAGE 1

PAGE 2

PAGE 3

PAGE 4

PAGE 5

PAGE 6

PAGE 7

PAGE 8

PAGE 9

PAGE 10

PAGE 11

PAGE 12

PAGE 13

PAGE 14